

# HENRY

Hydraulic Engineering Repository

Ein Service der Bundesanstalt für Wasserbau

---

Conference Paper, Published Version

**Barkdoll, Brian D.; Ettema, Robert; Kuhnle, Roger; Melville, Bruce W.; Parchure, Trimbak; Parola, Art; Alonso, Carlos**

## **Abutment Scour Countermeasures: A Review**

---

Verfügbar unter/Available at: <https://hdl.handle.net/20.500.11970/100378>

Vorgeschlagene Zitierweise/Suggested citation:

Barkdoll, Brian D.; Ettema, Robert; Kuhnle, Roger; Melville, Bruce W.; Parchure, Trimbak; Parola, Art; Alonso, Carlos (2002): Abutment Scour Countermeasures: A Review. In: Chen, Hamn-Ching; Briaud, Jean-Louis (Hg.): First International Conference on Scour of Foundations. November 17-20, 2002, College Station, USA. College Station, Texas: Texas Transportation Inst., Publications Dept.. S. 734-748.

### **Standardnutzungsbedingungen/Terms of Use:**

Die Dokumente in HENRY stehen unter der Creative Commons Lizenz CC BY 4.0, sofern keine abweichenden Nutzungsbedingungen getroffen wurden. Damit ist sowohl die kommerzielle Nutzung als auch das Teilen, die Weiterbearbeitung und Speicherung erlaubt. Das Verwenden und das Bearbeiten stehen unter der Bedingung der Namensnennung. Im Einzelfall kann eine restriktivere Lizenz gelten; dann gelten abweichend von den obigen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Documents in HENRY are made available under the Creative Commons License CC BY 4.0, if no other license is applicable. Under CC BY 4.0 commercial use and sharing, remixing, transforming, and building upon the material of the work is permitted. In some cases a different, more restrictive license may apply; if applicable the terms of the restrictive license will be binding.



## **Abutment Scour Countermeasures: A Review**

By

Brian Barkdoll<sup>1</sup>, Robert Ettema<sup>2</sup>, Roger Kuhnle<sup>3</sup>, Bruce Melville<sup>4</sup>, Trimbak Parchure<sup>5</sup>,  
Art Parola<sup>6</sup>, and Carlos Alonso<sup>7</sup>

### **ABSTRACT**

Scour of riverbeds at bridge abutments has been a problem for many years. Excessive scour can cause abutment damage and potential loss of life due to bridge collapse. Various countermeasures have been investigated and used with varying degrees of success. Countermeasures can be described in two categories: “bank and bed-hardening” and “flow-altering”. Among bank- and bed-hardening countermeasures are rip-rap, cable-tied blocks, Toskanes and similar interlocking devices, and soil cement. Flow-altering countermeasures include vanes, guide banks, and spur dikes of various configurations. These countermeasures either reduce local scour at the abutment or attempt to maintain the channel alignment so that the channel does not outflank the bridge. However, several practical considerations limit the viability of most countermeasures. The considerations include washout of bank-hardening elements, winnowing of the fines between bank-hardening elements, and scour outside the lateral domain of the bank-hardening elements. Flow-altering devices can be outflanked, can be ineffective when flow direction is altered, may wash out themselves, and can snag debris or ice. A three-year research project is underway by the authors and sponsored by the National Cooperative Highway Research Program of the Transportation Research Board to define which countermeasures merit further study and to develop design guidelines for those countermeasures.

### **INTRODUCTION**

The problem of scour around bridge abutments has been identified as one with potentially catastrophic results. Bridge failure can lead to the loss of life. In addition, the costs associated with repairs can be very expensive. Although extensive research has been performed on abutment scour, several questions remain. These substantial issues require further investigation. One issue concerns establishing effective countermeasures for

---

<sup>1</sup> Asst. Prof., Civil Eng. Dept., Univ. of Mississippi, University, MS 38677-1848, cvbark@olemiss.edu

<sup>2</sup> Prof., IIHR Hydroscience and Engineering, University of Iowa, Iowa City, IA 52242, Robert-Ettema@uiowa.edu

<sup>3</sup> Research Hydraulic Engineer, USDA-ARS National Sedimentation Lab., PO Box 1157, Oxford, MS, 38655, RKuhnle@ars.usda.gov

<sup>4</sup> Professor, Department of Civil and Env. Eng., Univ. of Auckland, Auckland, New Zealand, b.melville@auckland.ac.nz

<sup>5</sup> Research Hydraulic Engineer, US Army ERDC, 3909 Halls Ferry Road, Vicksburg, MS 39180-6199, Trimbak.M.Parchure@erdc.usace.army.mil

<sup>6</sup> Professor, Dept. of Civil Eng., Univ. of Louisville, Louisville, KY 40292, a.c.parola@louisville.edu

<sup>7</sup> Research Leader-CHWP, USDA-ARS National Sedimentation Lab., PO Box 1157, Oxford, MS, 38655, CAlonso@ars.usda.gov

protecting abutments against scour. The present paper was written to introduce a study aimed broadly at determining the range of effective scour countermeasures for abutments. It is hoped that presentation of the paper will stimulate useful discussion that may help the writers in conducting the study.

### **Unresolved Issues**

There has been voluminous work done on pier and abutment scour over the years dating back at least to the 1700's. Much of the previous work on abutment scour is illuminated here, but there are several main issues remaining. The main ones are highlighted here.

Riprap is the most common countermeasure used by state bridge engineers, yet what should the size, lateral extent, and thickness of the riprap be? Is filter fabric necessary to prevent the fines under the riprap from winnowing out? Can the riprap stones at the edge of the riprap blanket be the same size as the rest of the stones or should the size gradually decrease to provide a smoother transition to the parent material? Does bedform migration across riprap cause failure? Is tying the riprap together necessary and under what conditions should this be done?

Another common method of protecting bridge abutments is to provide a foundation depth significantly deeper than the scour depth. This approach assumes that our predictions of scour depth are accurate. Should abutments be designed to act as piers, thereby allowing for the case when the river changes course and flows around both sides of an abutment?

In addition, can we use our experience on bridge piers to bear on abutment scour? Obviously piers and abutments differ in shape and location, but perhaps there are ideas and countermeasures that will work on both.

In reference to river migration, can we, or perhaps more philosophically, should we keep the river from migrating? In view of river restoration efforts, where the stream is seeking to re-establish equilibrium, is there a way we can still maintain transportation and yet allow the river to meander where it likes? Which river training structures are most appropriate and what is the most efficient design?

These are but just a few of the many queries left to wrestle with in the very rich topic of bridge abutment scour countermeasures.

### **Background and Problem Statement**

#### *Countermeasures for Pier Scour*

The present study parallels an earlier study on countermeasures for bridge piers. The flow pattern around a pier and abutment have similar flow patterns in that both cause contraction scour, have a downward roller, side vortices, and vertical wake vortices. The countermeasures attempted for piers may also have applications for abutments. There have been studies on pier countermeasures by Lauchlan and Melville, 2001; Melville and Hadfield, 1999; Toro-Escobar et al., 1998; Melville et al., 1998; Richardson and Roberts, 1998; Shea and Ports, 1997; Burns et al., 1996; Bertoldi and Kilgore, 1993; Lewis, 1993; Richardson and Abed, 1993; Richardson and Wacker, 1991; Jones et al., 1995; Katsuya et al., 1989; and Richardson and York, 1989.



Fig. 1. Abutment scour at Muda River in Jediang, Malaysia (Photo courtesy of Shanker Kumar Sinnakaundan, River Engineering and Urban Drainage Research Center, Malaysia)

#### *Flow around Abutments and Failure Mechanisms*

In order to understand the mechanisms for abutment scour, it is first necessary to investigate the flow patterns as flow goes around an abutment. Most bridge abutments are in compound channels which are comprised of a main channel, in which flow would occur under non-flooding conditions, and a flood channel which is the over-bank area on either side of the main channel, in which flow occurs under flooding conditions.

The flow in compound open channels is an area of current research, but the present understanding is that the flow in the main channel is non-uniform, with a logarithmically-varying vertical velocity profile. This means slower velocities near the bed than near the water surface. In addition, the over-bank flow tends to be slower than the main channel velocities due to the higher roughness and lower flow depths.

When an abutment is introduced into this already-complicated flow field, vortices are formed that scour around the toe of the abutment and on the backside. Abutments come in various shapes and locations in the channel. Regardless of their extent into the channel, however, a vortex forms on the upstream side that has both a downward velocity and some lateral component. This is termed the downward flow/front vortex and can be associated with significant scour. As the flow turns the corner around the toe of the abutment a toe vortex forms that creates extensive scour. This is further exacerbated by the vertical wake vortex. Flow that is not involved in any of these vortices is returned from the over-bank areas into the main channel. This can lead to a contraction of the flow and subsequent flow acceleration. This acceleration can lead to what is termed “contraction scour” in the bed of the main channel (Richardson and Richardson, 1993a; Richardson and Richardson, 1993b).

If any of these scour events extend vertically below the abutment foundation, then collapse can result (Fig. 1).

Parola et al. (1998) document many observed abutment failures from which many of the above conclusions are based. Fischer has identified excessive contraction scour at several bridges in Iowa (Fischer, 1993, 1994, 1995, 1998).

There have been several studies to predict scour at bridge abutments. Principal among them are Melville (1992, 1997), Chang and Davis (1998), Kouchakzadeh and Townsend (1997, 1998), Melville (1995), Melville and Ettema (1993), Sturm (1998), Richardson and Richardson (1998), Hagerty and Parola (1992), Shen et al. (1993), Young et al. (1993, 1998), Sturm and Janjua (1993), Kheiraldin (1995), Sturm and Sadiq (1996), Dou et al. (1996), Sturm and Chrisochoides (1997, 1998a), Kohli and Hager (1997), and Molinas et al., (1998). While each of these studies has added some light to the subject, detailed design criteria need to be developed for existing and new countermeasures.

### *Armoring Countermeasures*

One commonly-used scour countermeasure is the enhancement of the bed's ability to resist erosion. This method is referred to as armoring, since the top layer of the sediment is hardened like a suit of armor. Methods included in this category are riprap, dolos or tetrapods, tied mats (including gabions), and soil cement.

The placement of riprap at the base and side of abutments has been used extensively in river and coastal engineering (Gales, 1938; Quazi and Peterson, 1972; Neill, 1973; Posey, 1974; Hjorth, 1975; Breusers et al., 1977, Parola and Jones, 1991; Richardson et al., 1991; Parola, 1993; Chiew, 1992, 1994; Eve and Melville, 2000). Riprap placed exclusively for abutment scour mitigation has been studied by Atayee et al. (1993), who give some guidelines for riprap at abutments, and Smith (1984) who gives details of a case history of riprap used to protect a bridge in Canada. Sela and Oliger (1993) note the over-prediction of scour by equations based on laboratory studies and give riprap placement guidelines. Atayee (1993) gives guidelines for riprap at spill-through abutments that allow some passage of water and, thereby, relieve the return flow and contraction scour. Failure mechanisms at riprap-protected abutments include (1) shear failure of armor units, (2) winnowing of parent material, (3) seepage erosion of parent material, and (4) edge failure. Shear failure occurs when the hydrodynamic forces of flow around the abutment are able to transport the riprap material. Winnowing and seepage forces occur when seepage and turbulence remove fine particles below the riprap. With the underlying material gone, the riprap settles. The use of a filter, for example a geotextile material, can reduce winnowing. Some riprap installations function well without a filter, however. The exact use of filters in riprap is one of the goals of the present study. Edge failure occurs when the edge pieces of riprap are eroded away due to a sudden change in roughness of the bed material. With the edge pieces gone, other pieces of riprap are susceptible to erosion as well. Edge erosion occurs when the lateral extent of the riprap is insufficient and the edge pieces are, therefore, in a region of high shear stress. Each of these failure mechanisms will be extensively studied in the present work and detailed design guidelines prepared to avoid failure by these and other failure mechanisms. See Figs. 2 and 3 for laboratory applications of riprap and cable-tied blocks.

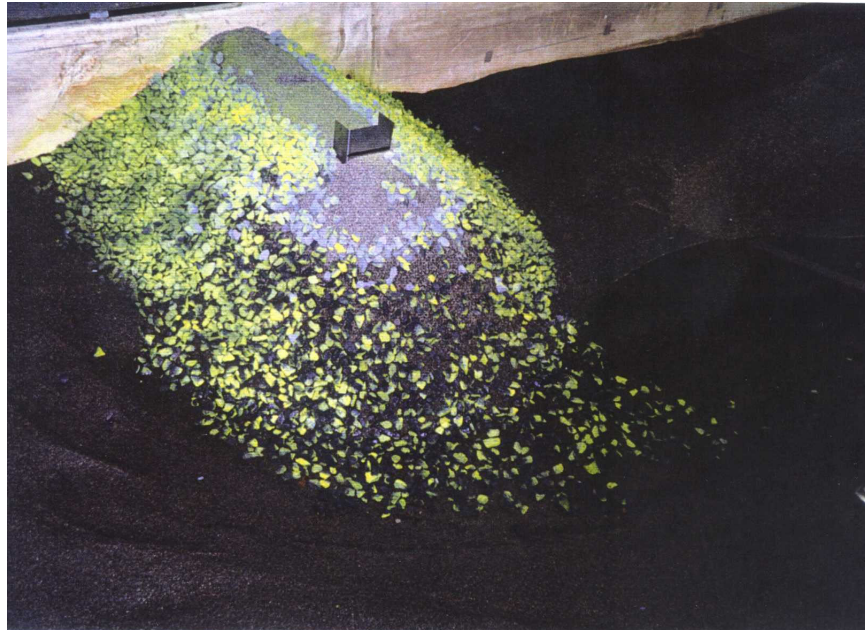


Fig. 2. Failure of riprap on an abutment in a laboratory experiment (Eve, 2000).

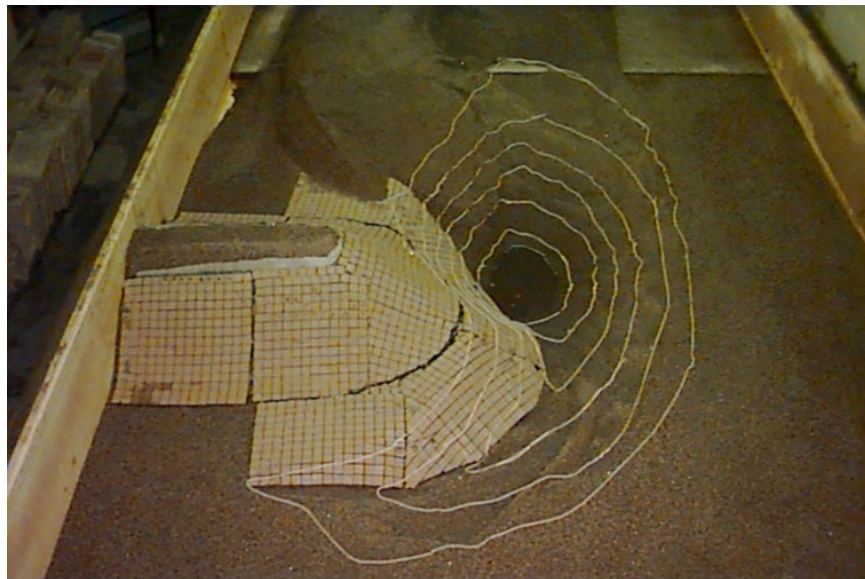


Figure 3: Laboratory test of spill-through abutment protection using cable-tied blocks, Hoe (2001)

Other methods that have been attempted for abutment scour mitigation are Toskanes, Tetrapods, reinforced soil, and tied mats. Burns et al. (1996) developed Toskanes as an alternative scour countermeasure where riprap is not feasible. Results of model studies and design guidelines are presented. Ruff et al. (1995) used Toskanes to protect bridge piers. Reinforced soil was used by Adams et al. (1999) for bridge abutments but they conclude that reinforced soil is not suitable for permanent bridges in scour zones.

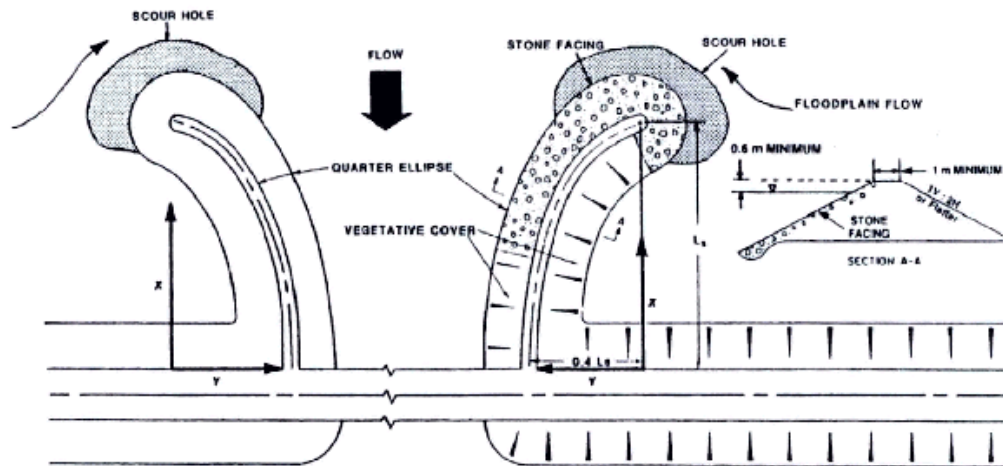


Fig. 4. Example of typical guide banks (from Lagasse et al., 2001).

#### *Flow-altering Countermeasures*

In contrast to countermeasures that armor the sediment surface, flow-altering countermeasures reduce the ability of the flow to scour sediment. Flow-altering countermeasures include guidebanks (Fig. 4), dikes or spurs (Fig. 5), to train the upstream river and in-channel devices such as vanes and bendway weirs. Although there have been many studies on spur dikes for river training (Kuhnle et al., 1997, 1998, and 1999; Farsirotou et al., 1998; Molinas et al., 1998; Zhang and Du, 1997; Soliman et al., 1997; Tominaga et al., 1997; Wu and Lin, 1993; Khan and Chaudry, 1992; Shields et al., 1991, 1995, and 1998; Molis et al., 1995; Mayerle et al., 1995; Muneta and Shimizu, 1994), the use of spur dikes specifically for use upstream of abutments was studied by Herbich (1967) using fixed-bed and movable-bed laboratory models and Richardson and Simons (1984) give design recommendations based on the literature. Lagasse et al., (1995) and Richardson et al. (1990) give design guidelines for impermeable and permeable spurs, guide banks, and riprap stability factor design. Richardson and Davis (1995) give guidelines for sizing rock riprap at abutments. Vanes have been used for erosion reduction on river bends (Ettema, 1990 and 1992; Odgaard and Kennedy, 1982; Odgaard and Kennedy, 1983; Odgaard and Lee, 1984; Odgaard and Mosconi, 1987; Odgaard and Spoljaric, 1986; Odgaard, Spoljaric, and Mosconi, 1988; Odgaard and Wang, 1990; Odgaard and Wang, 1990; Odgaard and Wang, 1991) and for reducing sediment ingestion in intakes (Barkdoll, Ettema, and Odgaard, 1999). They are small foils placed in the riverbed at an angle of attack to the flow, which creates a vortex downstream that can be used to manage sediment and alter flow.



Fig. 5. Spur dike on Goodwin Creek Experimental Watershed, Mississippi. Flow direction is from right to left.

### *Scale Effects*

There is a widely held concern that laboratory studies on scour find greater scour depths than occur in full-scale situations. Sturm and Chrisochoides (1997) investigated scale effects for bridge abutments, but they used only two different scales. Ettema, Melville, and Barkdoll (1996), who focused on pier scour, also noted scale effects. They concluded that scale effects are significant and can be difficult to predict due to scale-related differences in strength of large-scale turbulence at piers and abutments. A set of experiments, entailing experiments over a wide range of scales, is needed to confirm the suspected scale effects.

### *Debris and Ice*

Potential problems with debris and ice can plague hydraulic structures in general and may have implications for selection and design of abutment scour countermeasures in forested and/or cold regions.

Debris can collect on bridge piers and abutments and, if not cleared, can alter the flow characteristics considerably. Debris can also cause a type of contraction scour in which the flow area is constricted and, therefore, raises the flow velocity and correspondingly increases the scour of the bed. Studies addressing debris flow include Mueller and Parola, 1998; Parola et al., 1998; and Hagarty, Parola, and Fenske, 1995.

Ice runs and jams are the principal ice concern for bridges. Bridge abutments often serve as flow constrictions leading to ice jams. In this regard, ice and debris likely have similar effects on scour at bridge crossings. Ice may also freeze to and modify the performance of scour-protection systems, such as vanes, riprap (e.g., by plucking riprap stones), and fender structures. These actions of ice need careful consideration when



designing abutments for ice-prone rivers. In overall terms, little work has been done to determine on ice effects on scour at bridge abutments. The few prior studies concerning ice and local scour (e.g., Yankielun and Zabilansky (2000), Zabilansky 2000) have focused essentially on developing field instrumentation and on obtaining field measurements from a single bridge site. There is scope for considerable fundamental investigation into ice effects on scour at abutments.

The principle studies in the area of ice interaction with hydraulic structures are: Ettema, 1999; Ettema et al., 1999; Tan, Sinha, and Ettema, 1999; Streitz and Ettema, 1998; Ettema et al., 1998; Ettema et al., 1997a and b; Smith and Ettema, 1997a and b; Braileanu, Ettema, and Muste, 1997; Urroz and Ettema, 1994a, b, c, and d; Urroz, Schaefer, and Ettema, 1994; Teal, Ettema, and Walker, 1994a and b; Yoon and Ettema, 1993; Nixon, Ettema, Matsuishi, and Johnson, 1993; Braileanu, Ettema, and Wuebben, 1996; Chung, Howard, and Ettema, 1992; Yoon, Patel, and Ettema, 1992 and 1996; Tsai and Ettema et al., 1990; Ettema et al., 1991; Crissman, Ettema et. al., 1995; Ettema and Urroz-Aguirre, 1991; Jain and Ettema, 1989; Ettema et al., 1989; Schaefer, Ettema, and Nixon, 1989; Stern, Ettema, and Lazaro, 1989; Nixon and Ettema et al., 1989; Teal and Ettema, 1994; Ettema et al., 2000.

## **ABUTMENT SCOUR COUNTERMEASURE STUDY**

This review of existing countermeasures is part of an ongoing study funded by the National Cooperative Highway Research Program of the Transportation Research Board. At the writing of this paper, Project NCHRP 24-18 is finishing Phase I in which all existing information was gathered, each state Department of Transportation was surveyed as to their abutment scour countermeasure experiences, and countermeasures worthy of further laboratory study were identified. Phase II will include laboratory experiments to guide in the formation of design guidelines for selected abutment scour countermeasures.

## **REFERENCES**

1. Adams, M., Ketchart, K., Ruckman, A., DiMillio, A.F., Wu, J., and Satyanarayana, R. (1999). "Reinforced soil for bridge support applications on low-volume roads." *Transportation Research Record, Proc. 7<sup>th</sup> Int. Conf. On Low-Volume Roads*, p. 150.
2. Atayee, A.T., Pagan-Ortiz, J.E., Jones, J.S., and Kilgore, R.T. (1993). "Study of riprap as scour protection for bridge abutments." *Proc. Conf. Hydraulic Engrg*, Part 1, ASCE, p.973.
3. Austroads (1994) "Waterway design - A guide to the hydraulic design of bridges, culverts and floodways," Austroads, Sydney, Australia, 139pp.
4. Barkdoll, B.D., Ettema, R., and Odgaard, A.J. (1999). "Sediment control at lateral diversion: limits and enhancements to vane use." *J. Hydraulic Engrg*, Vol. 125, No. 8, Aug 1999, ASCE, p. 862.
5. Bertoldi, D. and Kilgore, R. (1993). "Tatrapods as a scour countermeasure." *Proc. Nat. Conf. Hydraulic Engrg*, ASCE, p.1385.
6. Biglari, B. and Sturm, T.W. (1998). "Numerical modeling of flow around bridge abutments in compound channel." *J. Hydraulic Engrg*, v 124 n 2 Feb 1998, ASCE, p. 156.
7. Blodgett, J.C. and McConaughy, C.E. (1985) "Evaluation of rock riprap design practices for protection of channels near highway structures - Phase I," Preliminary Report subject to revision, prepared by the U.S. Geological Survey in cooperation with Federal Highway Administration.
8. Braileanu, F., Ettema, R., and Muste, Marian (1997). "Laboratory study of suspended-sediment transport in ice-cover flow." *Congr. Int. Assoc. of Hydraulic Research, IAHR*. Part B-2 v B pt 2 ASCE p 1239

9. Braileanu, F., Ettema, R., and Wuebben, (1996). "Evaluation of flow resistance in ice-covered channels." *Proc. 1996 8th Int. Conf. Cold Regions Engrg* Aug 12-16 1996 ASCE p 606
10. Breusers, H.N.C. and Raudkivi, A.J. (1991). "Scouring." *IAHR Hydraulic Structures Design Manuel 2*, IAHR.
11. Breusers, H.N.C., Nicollet, G., and Shen, H.W. (1977). "Local scour around cylindrical piers." *J. Hydraulic Resrch.*, 15(3), p.211.
12. Brown, S.A. and Clyde, E.S. (1989) "Design of riprap revetment," Hydraulic Engineering Circular 11 (HEC-11), Report No. FHWA-IP-89-016, Federal Highway Administration, U.S. Department of Transportation, Washington, D.C., U.S.A.
13. Burns, R.S., Fotherby, L.M., Ruff, J.F., and Carey, J.M. (1996) "Design example for bridge pier scour measures using Toskanes." *Transportation Research Record* n 1523 Nov 1996 p 173
14. Central Board of Irrigation and Power (1989) "River behaviour management and training," edited by C.V.J. Sharma, K.R. Saxema and M.K. Rao, Publication No. 204, Vol. 1, Central Board of Irrigation and Power, New Delhi, India, 469pp.
15. Chang, F. and Davis, S. (1998). "Maryland SHA procedure for estimating scour at bridge abutment; Part 1 and 2." *Conf. Proc. Hydraulic Engrg*, 1998, ASCE p. 169.
16. Chiew, Y.M. (1992). "Scour protection at bridge piers." *J. Hydr. Engrg.*, ASCE, 118(9), p. 1260.
17. Chiew, Y.M. (1995) "Mechanics of riprap failure at bridge piers," *Journal of Hydraulic Engineering* A.S.C.E., 121(9), 635-643.
18. Chiew, Y.M. (1994). "Riprap protection around a bridge pier." *Proc. 9<sup>th</sup> Congr. APD of IAHR*, 24-26 August, Singapore, Vol.2 p.11.
19. Chung, P.Y., Howard, W.S., Ettema, R. (1992). "Innovative intake design for Raritan river." 1992 *Nat. Conf. Environmental Engrg - Water Forum '92* Aug 2-6 1992 ASCE p 220
20. Crissman, R.D., Ettema, R., Andres, D., and Carson, R. (1995). "Ice jamming in upper Niagara River: processes and plan of study." *J. Cold Regions Engrg* v9 n2 Jun 1995 ASCE p 89
21. Croad, R.N. (1989) "Investigation of the pre-excavation of the abutment scour hole at bridge abutments," Report 89-A9303, Central Laboratories, Works and Development Services Corporation (NZ) Ltd., Lower Hutt, New Zealand, 38pp.
22. Dou, X, Jia, Y., and Wang, S.Y. (1996). "Numerical simulation of bridge abutment scour development." *Conf. Proc. Hydraulic Engrg*, 1996, Session BS-18.
23. Dou, X., Jones, J.S., Young, G.K., and Stein, S.M. (1998) "Using a 3-D model to predict local scour." *Proc. Int. Water Resources Engrg Conf. Part 1* (of 2), ASCE p. 198.
24. Escarameia, M. (1995) "Channel protection – Gabion mattresses and concrete blocks," Report SR 427, HR Wallingford, Oxfordshire, U.K.
25. Escarameia, M. and May, R.W.P. (1982) "Channel protection – Turbulence downstream of structures," Report SR 313, HR Wallingford, Oxfordshire, U.K.
26. Ettema, R. (1990). Hydraulic model studies of circulating-water and essential-service-water pump-intake structures, Korea Electric Power Corporation Yonggwang Station, Units 3 and 4. IIHR Limited Distribution Report No. 173
27. Ettema, R. (1992). Enhanced performance and reliability of water intakes for generating stations. Proposal of Iowa Institute of Hydraulic Research to Electric Power Research Institute
28. Ettema, R. (1999). "Loose-bed issues in river-ice hydraulics." *Proc. Int. Conf. on Cold Regions Engrg 'Putting Research Into Practice'* ASCE, p 588
29. Ettema, R., Braileanu, F., and Muste, M. (2000). "Method for estimating sediment transport in ice-covered channels." *J. Cold Regions Engrg* v14 n3 Sep 2000 ASCE p 130
30. Ettema, R., Fujita, I., Muste, M., and Kruger, A. (1997a). "Particle-image velocimetry for ice-field velocities." *Proc. 1997 27th Congr. Int. Assoc. Hydr. Resrch*, IAHR. Part B-1 vB pt 1 ASCE p 137
31. Ettema, R., Fujita, I., Muste, M., Kruger, A. (1997b). "Particle-image velocimetry for whole-field measurement of ice velocities." *Cold Regions Science and Technology* v 26 n 2 Oct 1997 p 97
32. Ettema, R., Melville, B.W., and Barkdoll, B.D. (1998). "Scale effect in pier-scour experiments." *J. Hydraulic Engrg.*, Vol. 124, No. 6, ASCE, p. 639.
33. Ettema, R., Muste, M, and Kruger, A. (1999). "Ice jams in river confluences." *CRREL Report n99-6* May 1999 p 70.
34. Ettema, R.; Schaefer, J.A.; Huang, H.P (1998). "Ice-tank data on brash-ice loads against barges." *J. Cold Regions Engrg* v 12 n 3 ASCE p 153.

35. Ettema, R., Sharifi, M.B., Georgakakos, K.P., and Stern, F. (1991). "Chaos in continuous-mode icebreaking." *Cold Regions Science and Technology* v 19 n 2 May 1991 p 131
36. Ettema, R., Stern, F., and Lazaro, J. (1989). "Dynamics of continuous-mode icebreaking by a polar-class hull. part 1. mean response." *J. Ship Research* v 33 n 2 Jun 1989 p 115
37. Ettema, R., Urroz-Aguirre, G.E. (1991). "Friction and cohesion in ice rubble reviewed." *Cold Regions Engrg Sixth Int. Cold Regions Engrg Conf.* ASCE, p 316
38. Ettema, R. Zabilansky, L. and Bledsoe, B., (2000). "Ice-induced thalweg oscillations along the Fort Peck Reach of the Missouri River." ASCE Water Resources Conference, Minneapolis, MN.
39. Eve, N. (2000) "Riprap protection at bridge abutments," Thesis submitted in partial fulfilment of the requirements for the degree of Master of Engineering, The University of Auckland, Auckland, New Zealand, 163 pp.
40. Eve, N.J. and Melville, B.W. (2000). "Riprap protection of bridge abutments under clear water conditions," ASCE, *Proc. Conf. Water Resources Engrg and Water Resources Planning and Management*, Minneapolis.
41. Farabee, G.B. (1986) "Fish species associated with revetted and main channel border habitats in Pool 24 of the Upper Mississippi River," *N. American J. of Fisheries Management* 6, 504-508.
42. Farraday, R.V. and Charlton, F.G. (1983) "Hydraulic factors in bridge design," Hydraulics Research Station, Wallingford, England, 102pp.
43. Farsirotou, E.D., Soulis, J.V., and Dermisiss, V.D. (1998). "Two-dimensional, multi-grid, viscous, free-surface flow calculation." *Proc. 1998 7th Int. Conf. Hydraulic Engrg. Software*, HYDROSOFT, p 13.
44. Fischer, E.E. (1993). "Scour at a bridge over the Weldon River, Iowa." *Conf. Proc., Hydraulic Engrg '93*, Vol. 2, ASCE, Reston, VA, pp. 1854-9.
45. Fischer, E.E. (1994). "Contraction Scour at a Bridge over the Iowa River." *Conf. Proc., Hydraulic Engrg '94*, Vol. 1, ASCE, Reston, VA, pp. 31-5.
46. Fischer, E.E. (1995). "Contraction Scour at a Bridge over Wolf Creek, Iowa." *Conf. Proc., Hydraulic Engrg '95*, Vol. 1, ASCE, Reston, VA, pp. 430-4.
47. Forchheimer, P. (1914) "Hydraulik," Teubner, Leipzig/Berlin.
48. Gales, R.R. (1938). "The principles of river training for railway bridges, and their application to the case of the Harding Bridge over the Lower Ganges at Sara." *J. Inst. of Civil Engrgs* (UK), 10(2), p.136.
49. Gregorius, B.H. (1985) "Waterway design procedures - Guidelines," Civil Division Publication, Ministry of Works and Development, Hamilton, New Zealand, 57pp.
50. Hagerty, D.J. and Parola, A.C. (1992). "Seepage influence on stability of bridge abutments." *Conf. Proc. Hydraulic Engrng*, 1992, ASCE, p. 900
51. Hagerty, D.J., Parola, A.C., and Fenske, T.E. (1995). "Impacts of the 1993 Upper Mississippi River Basin floods on highway systems," *Proc. 74<sup>th</sup> Ann.Mtg.*, TRB.
52. Herbich, J.B. (1967). "Prevention of scour at bridge abutments." *Proc. 12<sup>th</sup> Congr. Int. Assoc. Hydraulic Resrch.*, p.74.
53. Harris, J.D. (1988) "Hydraulic design of bridges," Chapter I, MTC Drainage Manual, Drainage and Hydrology Section, Ontario Ministry of Transportation, Downsview, Ontario, Canada.
54. Hjorth, P. (1975). "Studies of the nature of local scour." *Bulletin Series A*, No. 46, Dept. of Water Resources Engineering, Univ. of Lund, Sweden.
55. Hoe, D. (2001) "Cable-tied block protection of bridge abutments," Fourth Year project in Resource Engineering, Department of Civil and Resource Engineering, The University of Auckland, Auckland, New Zealand.
56. Hudson, K. and East, G.R.W. (1991) "Geo-textiles," Transit New Zealand Research Report, Wellington, New Zealand.
57. Isbash, S.V. (1935) "Construction of dams by dumping stones in flowing water," A. Dovjikov, translator, War Department, U.S. Engineer Office, Engineering Division, Eastport, Me.
58. Isbash, S.V. (1936) "Construction of Dams by Depositing Rock on Running Water" *Trans. 2nd Congress on Large Dams*, Vol. 5, Washington, D.C. 1936, pp. 123-135.
59. Jain, S.C. and Ettema, R. (1989). "Minimization of frazil-ice production by river-flow regulation." *J. of Hydraulic Engrg* v 115 n 9 Sep 1989 p 1256
60. Jones, J. S., Bertoldi, D., Stein, S. (1995). "Alternative scour countermeasures." *Proc. 1st Int. Conf. Water Resources*. Part 2 (of 2) Aug 14-18 1995 v2 1995 ASCE p 1819

61. Khan, K.W.; Chaudhry, M.H. (1992) "Numerical modelling of flow around spur dikes." *Proc.4 Int Conf Hydraul Eng Software HYDROSOFT/92* p 223.
62. Kheiraldin, K.A. (1995). "Scour at bridge abutments." *Conf. Proc. Water Resources Engrg*, 1995, ASCE, p.1829.
63. Kohli, A. and Hager, W.H. (1997). "Building scour in floodplains." *Conf. Proc. Hydraulic Engrg*, 19937 ASCE p. 214.
64. Kouchakzadeh, S. and Townsend, R.D. (1997). "Influence of lateral momentum transfer on bridge abutment scour." *Conf. Proc. Hydraulic Engrg.*, 1997, ASCE, p.190.
65. Kouchakzadeh, S. and Townsend, R.D. (1998). "Bridge abutment scour in compound-shaped river channels." *Stream Stability and Scour at Highway Bridges*, ASCE Reston, VA pp. 417.
66. Kuhnle, R.A., Alonso, C.V., Shields,F.D. (1997). "Volume of scour holes associated with spur dikes." *Proc. 1997 27th Cong. Int. Assoc. Hydraulic Research*. Part B-1, v B pt, p.418.
67. Kuhnle, R. A.; Alonso, C.V., Shields, F.D. (1998). "Volume of scour holes for angled spur dikes." *Proc. 1998 Int. Water Resources Engrg Conf*. Part 2 (of 2) v 2 1998, ASCE, p .1613.
68. Kuhnle, R. A.; Alonso, C.V., Shields, F.D. (1999). "Geometry of scour holes associated with 90-degree spur dikes." *J. Hydraulic Engrg* v 125 n 9 Sep, 1999, ASCE, p.972.
69. Lagasse, P.F, Schall, J.D., Johnson, F., Richardson E.V., and Chang, F. (1995) "Stream Stability at Highway Structures." *Report No. FHWA IP-90-014, HEC-20, FHWA*.
70. Lagasse, P.F., Byars, M.S., Zevenbergen, L.W., and Clopper, P.E. (1997). "Bridge scour and stream instability countermeasures." *FHWA HI-97-030 HEC-23, FHWA*.
71. Lauchlan, C.S. (1999) "Pier Scour Countermeasures" Ph.D. thesis, The University of Auckland, Auckland, New Zealand.
72. Lauchlan, C.S. and Melville, B.W. (2001) "Riprap protection at bridge piers," *Journal of Hydraulic Engineering*, ASCE, 127(5), 412-418.
73. Lewis, G.L. (1993). "Shale scour at BNRR Yellowstone River Bridge, MT." *Proc. Nat. Conf. on Hydraulic Engrg* Jul 25-30 1993 npt 2 1993 ASCE p 2255
74. Lim, F.H. and Chiew, Y.M. (1997) "Stability of riprap layer under live-bed conditions," *Conference on Management of Landscapes disturbed by Channel Incision*, Oxford, Mississippi, U.S.A., May.
75. Mayerle, R.; Toro, F.M.; Wang, S.S.Y.(1995). "Verification of a three-dimensional numerical model simulation of the flow in the vicinity of spur dikes." *J. Hydr. Research* v33 n2 1995 p 243.
76. McCorquodale, J.A., Moawad, A. and McCorquodale, A.C. (1993) "Cable tied block erosion protection," *Hydraulic Eng.* 93, ASCE conference, San Francisco, California, pp.1367-1373.
77. Macky, G.H. (1986) "Model testing of bridge abutment scour protection," *Report 3-86/12*, Central Laboratories, Ministry of Works and Development, Lower Hutt, New Zealand, pp62.
78. Maynard, S.T. (1987) "Stable riprap size for open channel flows," Ph.D. thesis, Department of Civil Engineering, Colorado State University.
79. Maynard, S.T. (1988) "Stable riprap size for open channel flows," *Technical Report HL-88-4*, U.S. Army Engineer Waterways Experiment Station, Vicksburg, Miss.
80. Maynard, S.T. (1993) "Flow impingement, Snake River, Wyoming," *Technical Report HL-93-9*, U.S. Army Engineer Waterways Experiment Station, Vicksburg, Miss.
81. Maynard, S.T., Ruff, J.F. and Abt, S.R. (1989) "Riprap design," *Journal of Hydraulic Engineering*, ASCE, 115(7), 937-949.
82. Melville, B.W. (1992). "Local scour at bridge abutments." *J. Hydr, Engrg.*, ASCE, 118(4), p. 615.
83. Melville, B.W. (1995). "Bridge abutment scour in compound channels." *J. Hydr, Engrg.*, ASCE, 121(12), p. 863.
84. Melville, B.W. (1997) "Pier and Abutment Scour: An Integrated Approach", *Journal of Hydraulic Engineering*, ASCE, 123(2), 125-136, February 1997.
85. Melville, B.W. and Coleman, S.E. (2000). *Bridge Scour*, Water Resources Publications.
86. Melville, B.W. and Ettema, R. (1993). "Bridge abutment scour in compound channels." *Conf. Proc. Hydraulic Engrng*, 1993, ASCE p. 767.
87. Melville, B.W. and Hadfield, A.C.; (1999). "Use of sacrificial piles as pier scour countermeasures." *J. Hydraulic Engrg* v125 n11 1999 ASCE p 1221
88. Melville, B.W., Hadfield, A.C., and Lauchlan, C.S.; *Proc. 1998 Int. Water Resources Engrg Conf*. Part 1 (of 2) Aug 3-7 v 1 1998 Memphis, TN, USA, Sponsored by : ASCE p 39

89. Melville, B.W. and Parola, A.C. (1995). "The need for additional abutment scour research." *Proc. 1<sup>st</sup> Int. Conf. Water Resources Engrg*, ASCE, San Antonio, Texas, p. 1239.
90. Ministry of Works and Development (1979) "Code of practice for the design of bridge waterways," Civil Division Publication CDP 705/C, Ministry of Works and Development, Wellington, New Zealand, 57pp.
91. Molinas, A., Kheireldin, K., Wu, and Baosheng (1998). "Shear stress around vertical wall abutments." *J. Hydraulic Engrg*, v 124 n 8 Aug 1998 ASCE, p.822.
92. Molinas, A., Reiad, N.G.Y., and Jones, S. (1998). "Effect of cohesion on abutment scour." *Conf. Proc. Water Resources Engrg*, 1998, ASCE p. 252.
93. Molis, I.; Chaudhry, M. Hanif; Khan, K. Wasey (1995) "Numerical simulation of two-dimensional flow near a spur-dike." *Advances in Water Resources* v18 n4 1995 p. 227.
94. Mueller, D.S. and Parola, A.C. (1998). "Detailed scour measurements around a debris accumulation." *Proc. 1998 Int. Water Resources Engrg Conf.* Part 1 (of 2) Aug 3-7 1998 v 1, ASCE p 234
95. Muneta and Shimizu, 1994 "Numerical analysis model with spur-dike considering the vertical flow velocity distribution" *Proc. Japan Soc. of Civil Engrg* n 497 pt 2-2 1994 p. 31.
96. Neill, C.R. (1967) "Mean velocity criterion for scour of coarse uniform bed material", 12th IAHR Congress, Fort Collins, Colorado, Proc. Vol. 3, C6.1 - C6.9.
97. Neill, C.R. (1973). "*Guide to bridge hydraulics.*" Roads and Transportation Assoc. of Canada, Univ. of Toronto Press, Toronto, Canada.
98. Nixon, W.A., Ettema, R., Matsuishi, M., and Johnson, R.C. (1993). "Model study of cable-moored conical platform." *J. Cold Regions Engrg* v 7 n 1 Mar 1993 p 12
99. Nixon, W.A., Ettema, R., Matsuichi, M., and Johnson, R.C. (1989). "Model study of a cable-moored platform in sheet ice." *Proc. Eighth Int. Conf. Offshore Mechanics and Arctic Engrg* - 1989 Mar 19-23 v 4 n 8 1989 ASME, p 459
100. Odgaard, A.J. and Kennedy, J.F. (1982). Analysis of Sacramento River bend flows, and development of a new method for bank protection. IIHR Report No. 328, Iowa Institute of Hydraulic Research,
101. Odgaard, A.J. and Kennedy, J.F. (1983). "River-bend bank protection by submerged vanes." *J. Hydraulic Engrg*, A.S.C.E., 109(8), 1161-1173.
102. Odgaard, A.J. and Lee, H.Y.E. (1984). Submerged vanes for flow control and bank protection in streams. IIHR Report No. 279, Iowa Institute of Hydraulic Research
103. Odgaard, A.J. and Mosconi, C.E. (1987) "Streambank protection by submerged vanes." *J. Hydraulic Engrg*, A.S.C.E., 113(4), 520-536.
104. Odgaard, A.J. and Spoljaric, A. (1986). "Sediment control by submerged vanes." *J. Hydraulic Engrg*, ASCE, 112(12), 1164-1181.
105. Odgaard, A.J., Spoljaric, A., and Mosconi, C.E. (1988). A new marketable structure for streambank protection. IIHR Report No. 145, Iowa Institute of Hydraulic Research
106. Odgaard, A.J. and Wang, Y. (1990). Sediment control in bridge waterways. IIHR Report No. 336, Iowa Institute of Hydraulic Research
107. Odgaard, A.J. and Wang, Y. (1990). Hydraulic-laboratory model study of river intake at Duane Arnold Energy Center. IIHR Limited Distribution Report No. 177, Iowa Inst. of Hydraulic Resrch
108. Odgaard, A.J. and Wang, Y. (1991). "Sediment management with submerged vanes. I: theory." *J. Hydraulic Engrg*, ASCE, 117(3), 267-283.
109. Okada, K., Muraishi, H., and Kunihiro, T. (1989). "Statistical judgement about stability of protection against scour around pier." *Proc. Japan Soc. Civil Engrnr* n 403 pt 6-10 Mar 1989 p 65
110. Pagan-Ortiz, J.E. (1991) "Stability of rock riprap for protection at the toe of abutments located at the flood plain," Report No. FHWA-RD-91-057, Federal Highway Administration, U.S. Department of Transportation, Washington, D.C., U.S.A., 125 pp.
111. Parker, G., Parola, A.C., Chiew, M., and Melville, B.W. (1989). "Countermeasures to protect bridge piers from scour." *NCHRP Report*, Transportation Research Board.
112. Parker, G., Toro-Escobar, C. and Voigt, R.L., Jr. (1998) "Countermeasures to protect bridge piers from scour," Final Report (Project NCHRP 24-7) prepared for National Co-operative Highway Research Program, University of Minnesota, Minneapolis, Minnesota, U.S.A., 402pp.
113. Parola, A.C. (1993). "Stability of riprap at bridge piers." *J. Hydr.c Engrg*, ASCE, 119(10)p. 1080.

114. Parola, A. C., Hagerty, D. J., and Kamojjala, S. (1998). "NCHRP 12-39: Highway Infrastructure Damage Caused by the 1993 Upper Mississippi River Basin Flooding." *National Research Council, Transportation Research Board 1483*, Washington, DC.
115. Parola, A.C., Hagarty, D.J., and Fenske, T.E. (1994). "Damage to highway infrastructure—1993 Mississippi River basin flooding." *Proc. ASCE Nat. Conf. on Hydraulic Engrg*, p.26.
116. Parola, A.C., Kamojjala, S., Richardson, J.E., and Kirby, M.W. (1998). "Numerical simulation of flow patterns at a bridge with debris." *Proc. Int. Water Resources Engrg Conf. Part 1 (orf 2)*, ASCE, p.240.
117. Pilarczyk, K.W. (1990) "Coastal protection," Short Course on Coastal Protection, Delft University of Technology, Balkema, Rotterdam, The Netherlands.
118. Posey, C.J. (1974). "Test of scour protection at bridge piers." *J. Hydraulic Engrg.*, ASCE, 110(12), p.1773.
119. Pzedwojski, B., Blazejewski, R. And Pilarczyk, K.W. (1995) "River training techniques," A.A. Balkema, Rotterdam, The Netherlands.
120. Quazi, M.E. and Peterson, A.W. (1972). "A method of bridge pier riprap design." *Proc. First Canadian Hydraulics Conf.*, Univ. of Alberta, Edmonton, Canada, p.96.
121. Richardson, E.V. and Abed, L. (1993). "Top width of pier scour holes in free and pressure flow." *Proc. 1993 Nat. Conf. Hydraulic Engrg. Part 1 (of 2) Jul 25-30 1993 npt 1 1993 ASCE p 911*
122. Richardson, E.V. and Davis, S.R. (1995). "Evaluating Scour at Bridges." *Publication No. FHWA HI-96-031, HEC 18, FHWA*.
123. Richardson, E.V. and Davis, S.R. (1995) "Evaluating scour at bridges," Report No. FHWA-IP-90-017, Hydraulic Engineering Circular No. 18 (HEC-18), Third Edition, Office of Technology Applications, HTA-22, Federal Highway Administration, U.S. Department of Transportation, Washington, D.C., U.S.A., November, 204pp.
124. Richardson, E.V., Simons, D.B. and Julien, P.Y. (1988) "Highways in the river environment," Federal Highway Administration, U.S. Department of Transportation, Washington, D.C., U.S.A.
125. Richardson, E.V., Harrison, L.J., and Davis, S.R. (1991). "Evaluating scour at bridges." *Report No. FHWA-IP-90-017 HEC 18*, Federal Highway Administration (FHWA), Washington, D.C.
126. Richardson, J.R. and Richardson, E.V. (1993a) Discussion of "Local scour at bridge abutments," by B.W. Melville, *J. Hydr. Engrg.*, ASCE, 119(9), 1069-71.
127. Richardson and Richardson (1993a), "The fallacy of local abutment scour equations." *Conf. Proc. Hydraulic Engrg*, 1993, ASCE, p. 749.
128. Richardson, J.R. and Richardson, E.V. (1993b) "Determining contraction scour." *Stream Stability and Scour at Highway Bridges*, ASCE Reston, VA pp. 483-91.
129. Richardson, J.R. and Roberts, D.L. (1998). "Non-structural method to reduce local pier scour." *Proc. 1998 Int. Water Resources Engrg Conf. Part 1 (of 2) Aug 3-7 1998 v 1 1998 Memphis, TN ASCE p 768*
130. Richardson, E.V. and Simons, D.B. (1984). "Use of spurs and guidebanks for highway crossing.: *Proc. Transportation Research Record 2<sup>nd</sup> Bridge Engrg. Conf.* v2 p.184.
131. Richardson, J.R. and Wacker, A.M. (1991). "Bridge scour and stream instability countermeasures." *Proc. 1991 Nat. Conf. Hydraulic Engrg* Jul 29-Aug 2 1991 1991 Nashville, TN, ASCE p 317
132. Richardson, J.R. and York, K. (1999). "Hydrodynamic countermeasures for local pier scour." *Transportation Research Record n1690 1999 p 186*
133. Ruff, J.F., Fotherby, L.M., and Burns, R.S. (1995). "Bridge pier scour protection using Toskanes." *Proc. 1st Int. Conf. Water Resources. Part 2 (of 2)*, ASCE p 1167.
134. Schaefer, J.A., Ettema, R., Nixon, W.A. (1989). "Measurements of icing hardness." *Cold Regions Science and Technology* v 17 n 1 Sep 1989 p 89
135. Sela, E. and Oligar, G.R. (1993). "In-depth scour evaluations for bridges in Pennsylvania." *Proc. 1993 Nat. Conf. on Hydraulic Engrg. Part 1 (of 2)*, ASCE, p. 525.
136. Shea, C. and Ports, M. (1997). "Physical and computational modeling of bridge scour at Oregon inlet, North Carolina." *Proc. 1997 27th Congr. Int. Asso. Hydraulic Research, IAHR. Part A Aug 10-15 1997 v A 1997 San Francisco, CA, ASCE p 220*
137. Shen, H.W., Chan, C.T., Lai, J.S., and Zhao, D. (1993). "Flow and scour near an abutment." *Conf. Proc. Hydraulic Engrng*, 1993, ASCE p. 743.

138. Shields, F.D., Cooper, C.M., and Testa, Samuel, III. (1995) "Towards greener riprap: Environmental considerations from microscale to macroscale," River, coastal and shoreline protection, erosion control using riprap and armourstone, C. R. Thorne, S. R. Abt, F. B. J. Barends, S. T. Maynard, and K. W. Pilarczyk, eds., John Wiley, New York, 557-574.
139. Shields, F.D. Jr.; Knight, S.S.; Cooper, C.M.; "Rehabilitation of watersheds with incising channels." *Water Resources Bulletin* v31 n6 Dec 1995 p 971.
140. Simons, D.B. and Lewis, G.L. (1971) "Report - flood protection at bridge crossings," prepared for the Wyoming State Highway Department in conjunction with the U.S. Department of Transportation, C.S.U. Civil Engineering Report No. CER71-72DBS-GL10.
141. Smart, G.M. (1990) "Riprap scour protection: Practices for New Zealand roads," DSIR, Hydrology Centre, Christchurch.
142. Smith, C.D. (1984). "Scour control at Outlook Bridge – a case study." *Canadian J. Civil Engrg*, v 11 n 4 Dec 1984 p. 709.
143. Smith, B.T.; Ettema, R. (1997a). "Ice-cover influence on flow structure over dunes." *J. Hydraulic Resrch* v 35 n 5 1997 p 707
144. Smith, B.T.; Ettema, R. (1997b). "Flow resistance in ice-covered alluvial channels." *J. Hydraulic Engrg* v 123 n 7 July 1997 ASCE p 592
145. Soliman, M.M., Attia, K.M., Kotb, Talaat, A.M., and Ahmed, A.F. "Spur dike effects on the river Nile morphology after high Aswan dam." *Proc., Cong. Int. Assoc. Hydraulic Research*, Part v A 1997 p 805.
146. Sousa Pinto, N.L. de (1959) "Riprap protection against scour around bridge piers," Masters thesis, University of Iowa, Iowa City, Iowa, U.S.A.
147. Spring, F.J.E. (1903) "River training and control of the guide bank system," Technical Paper No. 153, Railway Board, Government of India, New Delhi.
148. Stevens, M.A. and Simons, D.B. (1971) "Stability analysis for coarse granular material on slopes," Chapter 17 in Shen, H.W. (ed.), 1971, River Mechanics Water Resources Publications, Fort Collins, Colorado.
149. Stevens, M.A., Simons, D.B. and Lewis, G.L. (1976) "Safety factors for riprap protection," Journal of the Hydraulics Division, ASCE, 102(HY5), 637-655.
150. Streitz, J. and Ettema, R. (1998). "Tiltable windtunnel for investigating icing of planar surfaces." *Proc. 1998 9th Int. Conf. on Cold Regions Engrg*, ASCE, p 447.
151. Stern, F., Ettema, R., and Lazaro, J. (1989). "Dynamics of continuous-mode icebreaking by a polar-class hull. part 2. Spectral analysis." *J. Ship Research* v 33 n 3 Sep 1989 p 236
152. Sturm, T.W. (1998). "Abutment scour in compound channels." *Stream Stability and Scour at Highway Bridges*, ASCE Reston, VA, pp. 443.
153. Sturm, T.W. and Chrisochoides, A. (1997). "Local scaling of bridge abutment scour in compound channels." *Conf. Proc. Hydraulic Engrng*, 1997, ASCE p. 196.
154. Sturm, T.W. and Chrisochoides, A. (1998a). "Abutment scour in compound channels for variable setbacks." *Conf. Proc. Water Resources Engrng*, 1998, ASCE p. 174.
155. Sturm, T.W. and Chrisochoides, A. (1998b). "One-dimensional and two-dimensional estimates of abutment scour prediction variables." *Transportation Research Record* n 1647 Nov 1998 p. 18.
156. Sturm, T.W. and Janjua, N.S. (1993). "Bridge abutment scour in a floodplain." *Conf. Proc. Hydraulic Engrng*, 1993, ASCE p. 761.
157. Sturm, T.W. and Sadiq, A. (1996). "Bridge abutment scour in floodplain with backwater." *Conf. Proc. Hydraulic Engrng*, 1996, ASCE, Session BS-5.
158. Tan, C.A., Sinha, S.K., and Ettema, R. (1999). "Ice-cover influence on near-field mixing in dune-bed channel: numerical simulation." *J. Cold Regions Engrg* v 13 n 1 Mar 1999 ASCE p 1.
159. Teal, M.J.; Ettema, R. (1994). "Estimation of mean velocity for flow under ice cover." *Proc. Symp. Fundamentals and Advancements in Hydraulic Measurements Experimentation* ASCE p 242
160. Teal, M.J.; Ettema, R., and Walker, J.F (1994a). "Estimation of mean flow velocity in ice-covered channels." *J. Hydraulic Engrg* v120 n12 Dec 1994 ASCE p 1385
161. Teal, M.J.; Ettema, R., and Walker, J.F (1994b) "Estimation of mean flow velocity in ice-covered channels." *J. Hydraulic Engrg* v120 n12 Dec 1994 ASCE p 1385
162. Thorne, C.R., Abt, S.R. and Maynard, S.T. (1995) "Prediction of near-bank velocity and scour depth in meander bends for design of riprap revetments," River, coastal and shoreline protection:

- Erosion control using riprap and armourstone, C. R. Thorne, S. R. Abt, F. B. J. Barends, S. T. Maynard, and K. W. Pilarczyk, eds., Wiley, New York, 115-133.
163. Tominaga, A., Nagao, M., and Nezu, I (1997). "Flow structures and mixing processes around porous and submerged spur dikes." *Proc. 27th Congress of the Int. Assoc. of Hydraulic Resrch., IAHR*. Part B-1 v B pt 1 p 251.
  164. Toro-Escobar, C., Voigt, R., and Parker, G. (1998). "Cable-tied blocks as an alternative for protecting bridge piers against scour under mobile-bed conditions." *Proc. 1998 Int. Water Resources Engrg Conf*. Part 1 (of 2) Aug 3-7 1998 v 1 1998 Memphis, TN ASCE p 15
  165. Tsai, Whey-Fone; Ettema, R., Wang, S.L., Shih, L.Y., Hsiung, G.C., Hazell, C.R., Wortley, C. A. (1990) "Mathematical modelling of icebreaking pattern based on the elastic wave theory." *IAHR – Symp. Ice 1990* Aug 20-24 1990 Helsinki Univ of Technology p 811
  166. Urroz, G.E. and Ettema, R. (1994a). "Ice accumulation rate and the geometry of ice jams in river bends." *Proc. 1994 ASCE Nat. Conf. Hydraulic Engrg*, p 386
  167. Urroz, G.E. and Ettema, R. (1994b). "Application of two-layer hypothesis to fully developed flow in ice-covered curved channels." *Canadian J. Civil Engineering* v 21 n 1 Feb 1994 p 101
  168. Urroz, G.E.;Ettema, R. (1994c). "Small-scale experiments on ice-jam initiation in a curved channel." *Canadian J. Civil Engrg* v21 n5 Oct 1994 p 719
  169. Urroz, G.E. and Ettema, R. (1994d). Small-scale experiments on ice-jam initiation in a curved channel" *Canadian J. Civil Engrg* v21 n5 Oct 1994 p 719
  170. Urroz, G.E.; Schaefer, J., and Ettema, R. (1994). Bridge-pier location and ice conveyance in curved channels; *J. Cold Regions Engrng* v 8 n 2 Jun 1994 ASCE p 66
  171. Wu, X.; Lim, S.Y (1993). "Prediction of maximum scour depth at spur dikes with adaptive neural networks." *Civil-Comp93*, Part 3: Neural Networks and Combinatorial Optimization in Civil and Structural Engineering Civil-Comp93, p 61.
  172. Yankielun, N.E. and Zabilansky, L.J., (2000). "Laboratory investigation of a time domain reflectometry system for real-time bridge scour detection and monitoring." *J. Civil Engrg, Can. Soc. of Civil Engrg*.
  173. Yoon, B.; Ettema, R. (1993). "Droplet trajectories and icing-collision efficiencies for cylinders determined using LDV." *Cold Regions Science and Technology* v 21 n 4 Jul 1993 p 381
  174. Yoon, J.Y., Patel, V.C., and Ettema, R. (1992). Computation of flow in ice-covered dune-bed channels." *Proc. 9th Conf. Engrg Mechanics* ASCE p 385
  175. Yoon, J.Y., Patel, V.C., Ettema, R. (1996). "Numerical model of flow in ice-covered channel." *J. Hydraulic Engrg* v122 n1 Jan 1996 ASCE p 19
  176. Young, G.K., Dou, X., Saffarinia, K., and Jones, J.S. (1998). "Testing abutment scour model." *Conf. Proc. Water Resources Engrng*, 1993, ASCE p. 180.
  177. Young, G.K., Palaviccini, M., and Kilgore, R.T. (1993). "Scour prediction model at bridge abutments." *Conf. Proc. Hydraulic Engrng*, 1993, ASCE p. 755.
  178. Zabilansky, L., Ettema, R., Wuebben J. L., and Yankielun, N. E., (2000). Survey of River-Ice Influences on Channel Bathymetry along the Fort Peck Reach of the Missouri River, Winter 1998-1999. CRREL Report (to appear Nov 2000). U.S. Army Corps of Engineers, Cold Regions Research and Engineering
  179. Zabilansky, L.J., (2000). "Ice force and scour instrumentation for the White River, Vermont." U.S. Army Cold Regions Research and Engineering Laboratory, Hanover, NH, Special Report 96-6.
  180. Zhang, Y. and Du, X., (1997). "Limited scour around spur dike and the evaluation of its depth." *J. Xi'an Highway Transportation University* v17 n4 97 p 56.
  181. Zufelt, J.E.; Ettema, R. (1996). "Model ice properties." *CRREL Report* n1 Feb 1996 p19